

#whdentalwerk
f @ m
video.wh.com

Now at
your dealer
or wh.com



Long life. Compact. Precise.

Straight and
contra-angle
handpieces



alegra

OPTIONAL EXTERNAL SPRAY CLIP

for optimal cooling of the treatment site.



ERGONOMIC DESIGN

for fatigue-free operation.



SMALL HEAD

for optimal view of the treatment site.

PUSH-BUTTON CHUCKING SYSTEM

for simple, rapid bur changes with low actuating force.

360° ROTATION

for fatigue-free operation and ideal ergonomics.

HIGH TORQUE

for fast removal of tooth structure.


Maximum efficiency and safety during treatment

Made in AUSTRIA




Fast and precise preparation


For efficient use of straight and contra-angle handpieces with powerful W&H electric and air motors.

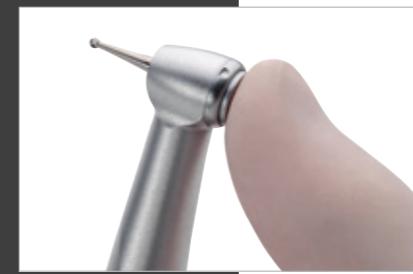

Simple bur changing
The push-button chucking system makes changing burs fast and easy.

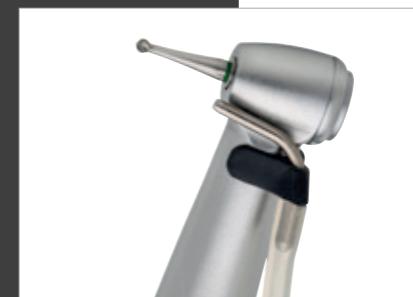

External spray cooling
The optional external spray clip enables cooling of the treatment site.

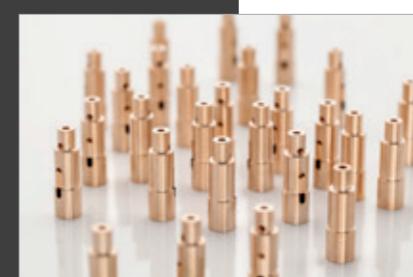


Your reliable partner
This combination makes W&H straight and contra-angle handpieces a perfect partner when working on your patients.



Fatigue-free operation

The excellent ergonomics prevent excessive strain on your hands during preparation. Discover the new Alegra straight and contra-angle handpieces for the most comfortable way to achieve the best results!

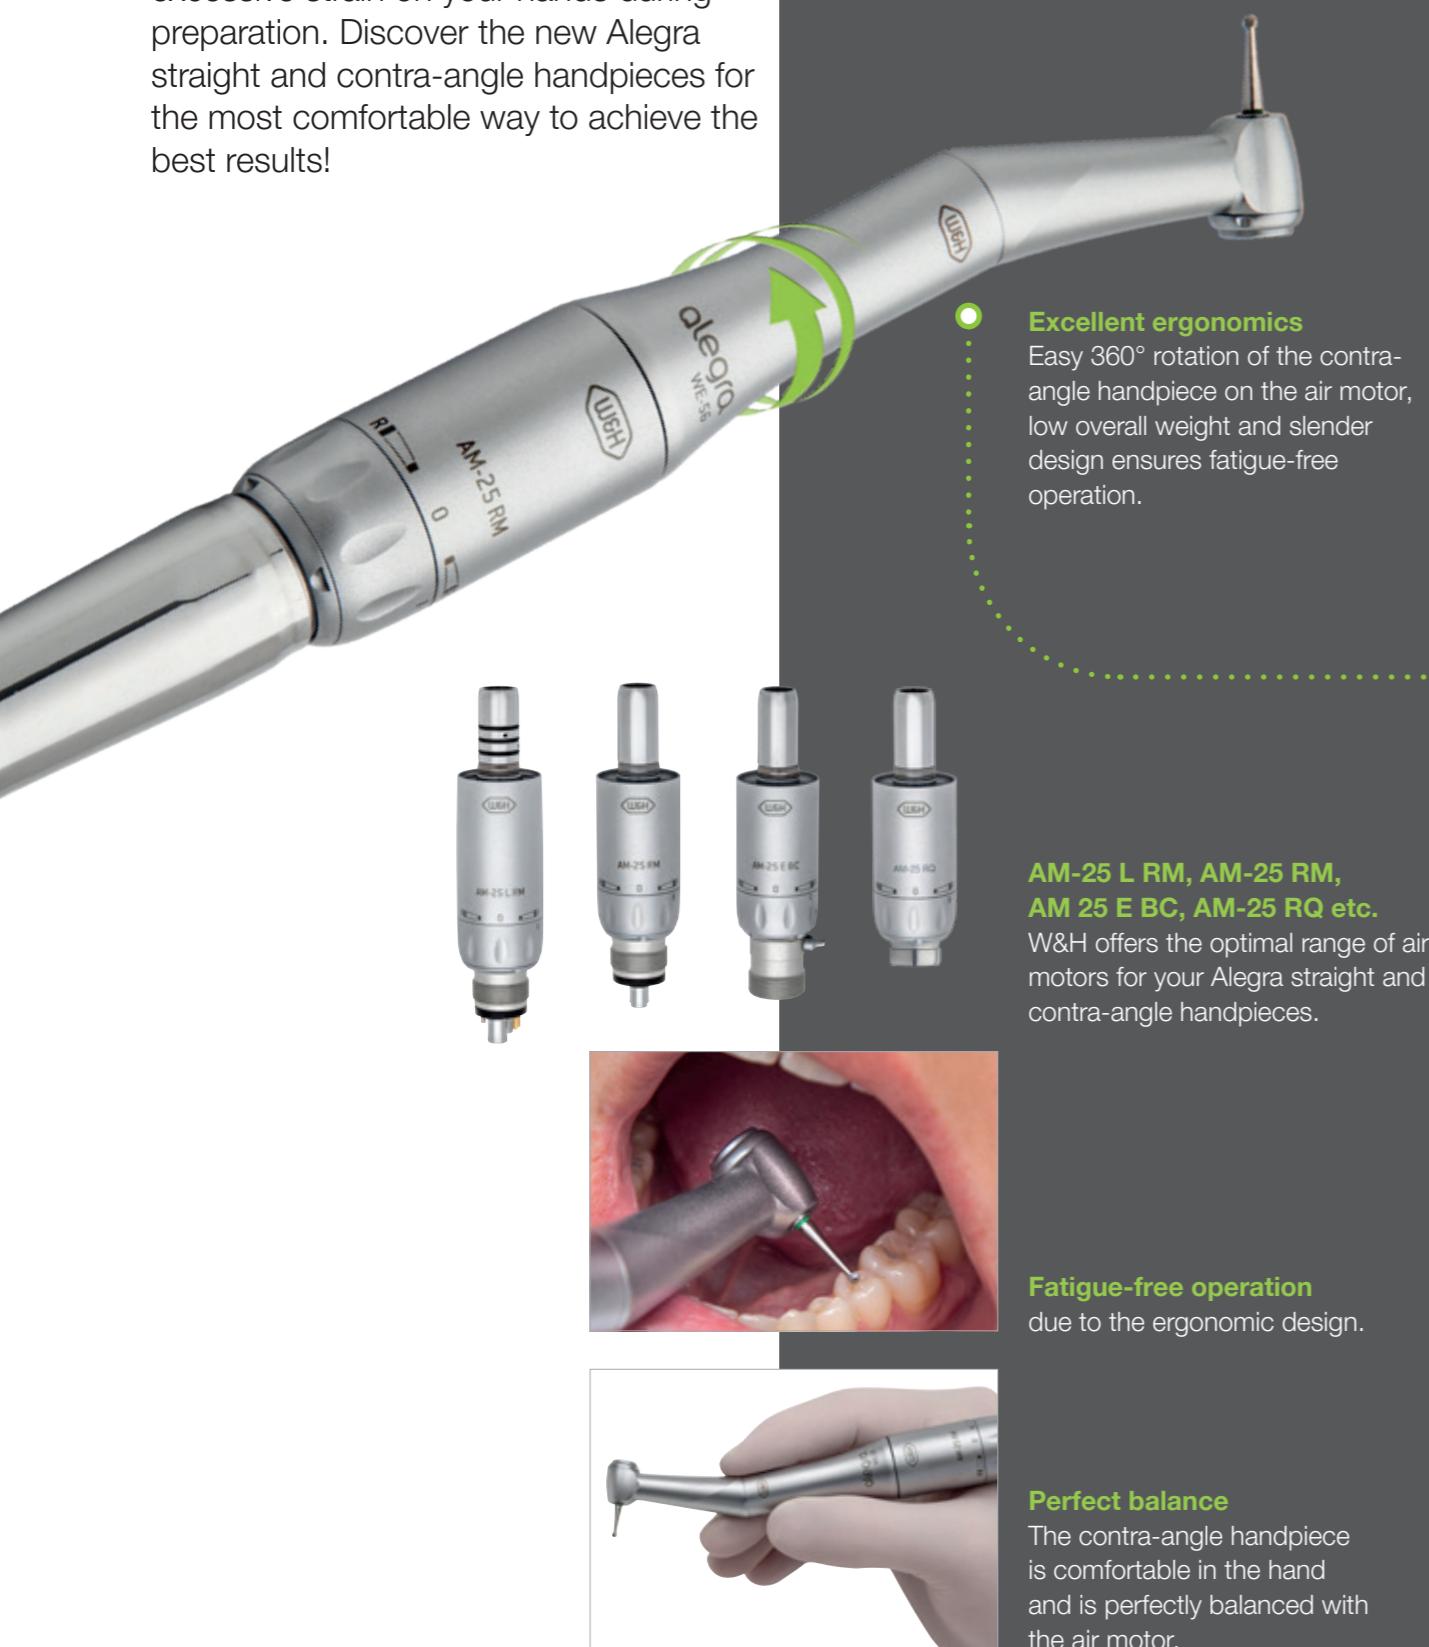

Best view and long life

The design of the Alegra straight and contra-angle handpieces allows optimal view of the treatment site. This is particularly useful in hard-to-access areas.



Best view
The small contra-angle handpiece head allows a direct view of the treatment site.



Durable and long life
High-quality materials make Alegra straight and contra-angle handpieces particularly durable and long lasting.




Further advantages at a glance

- Thermo washer disinfectable
- Sterilizable up to 135 °C

Hygiene is extremely important in the dental practice. W&H AIMS is here to help: with a wide product portfolio, fundamental knowledge, and all relevant information at a glance.

For your safety and the safety of your patients. aims.wh.com

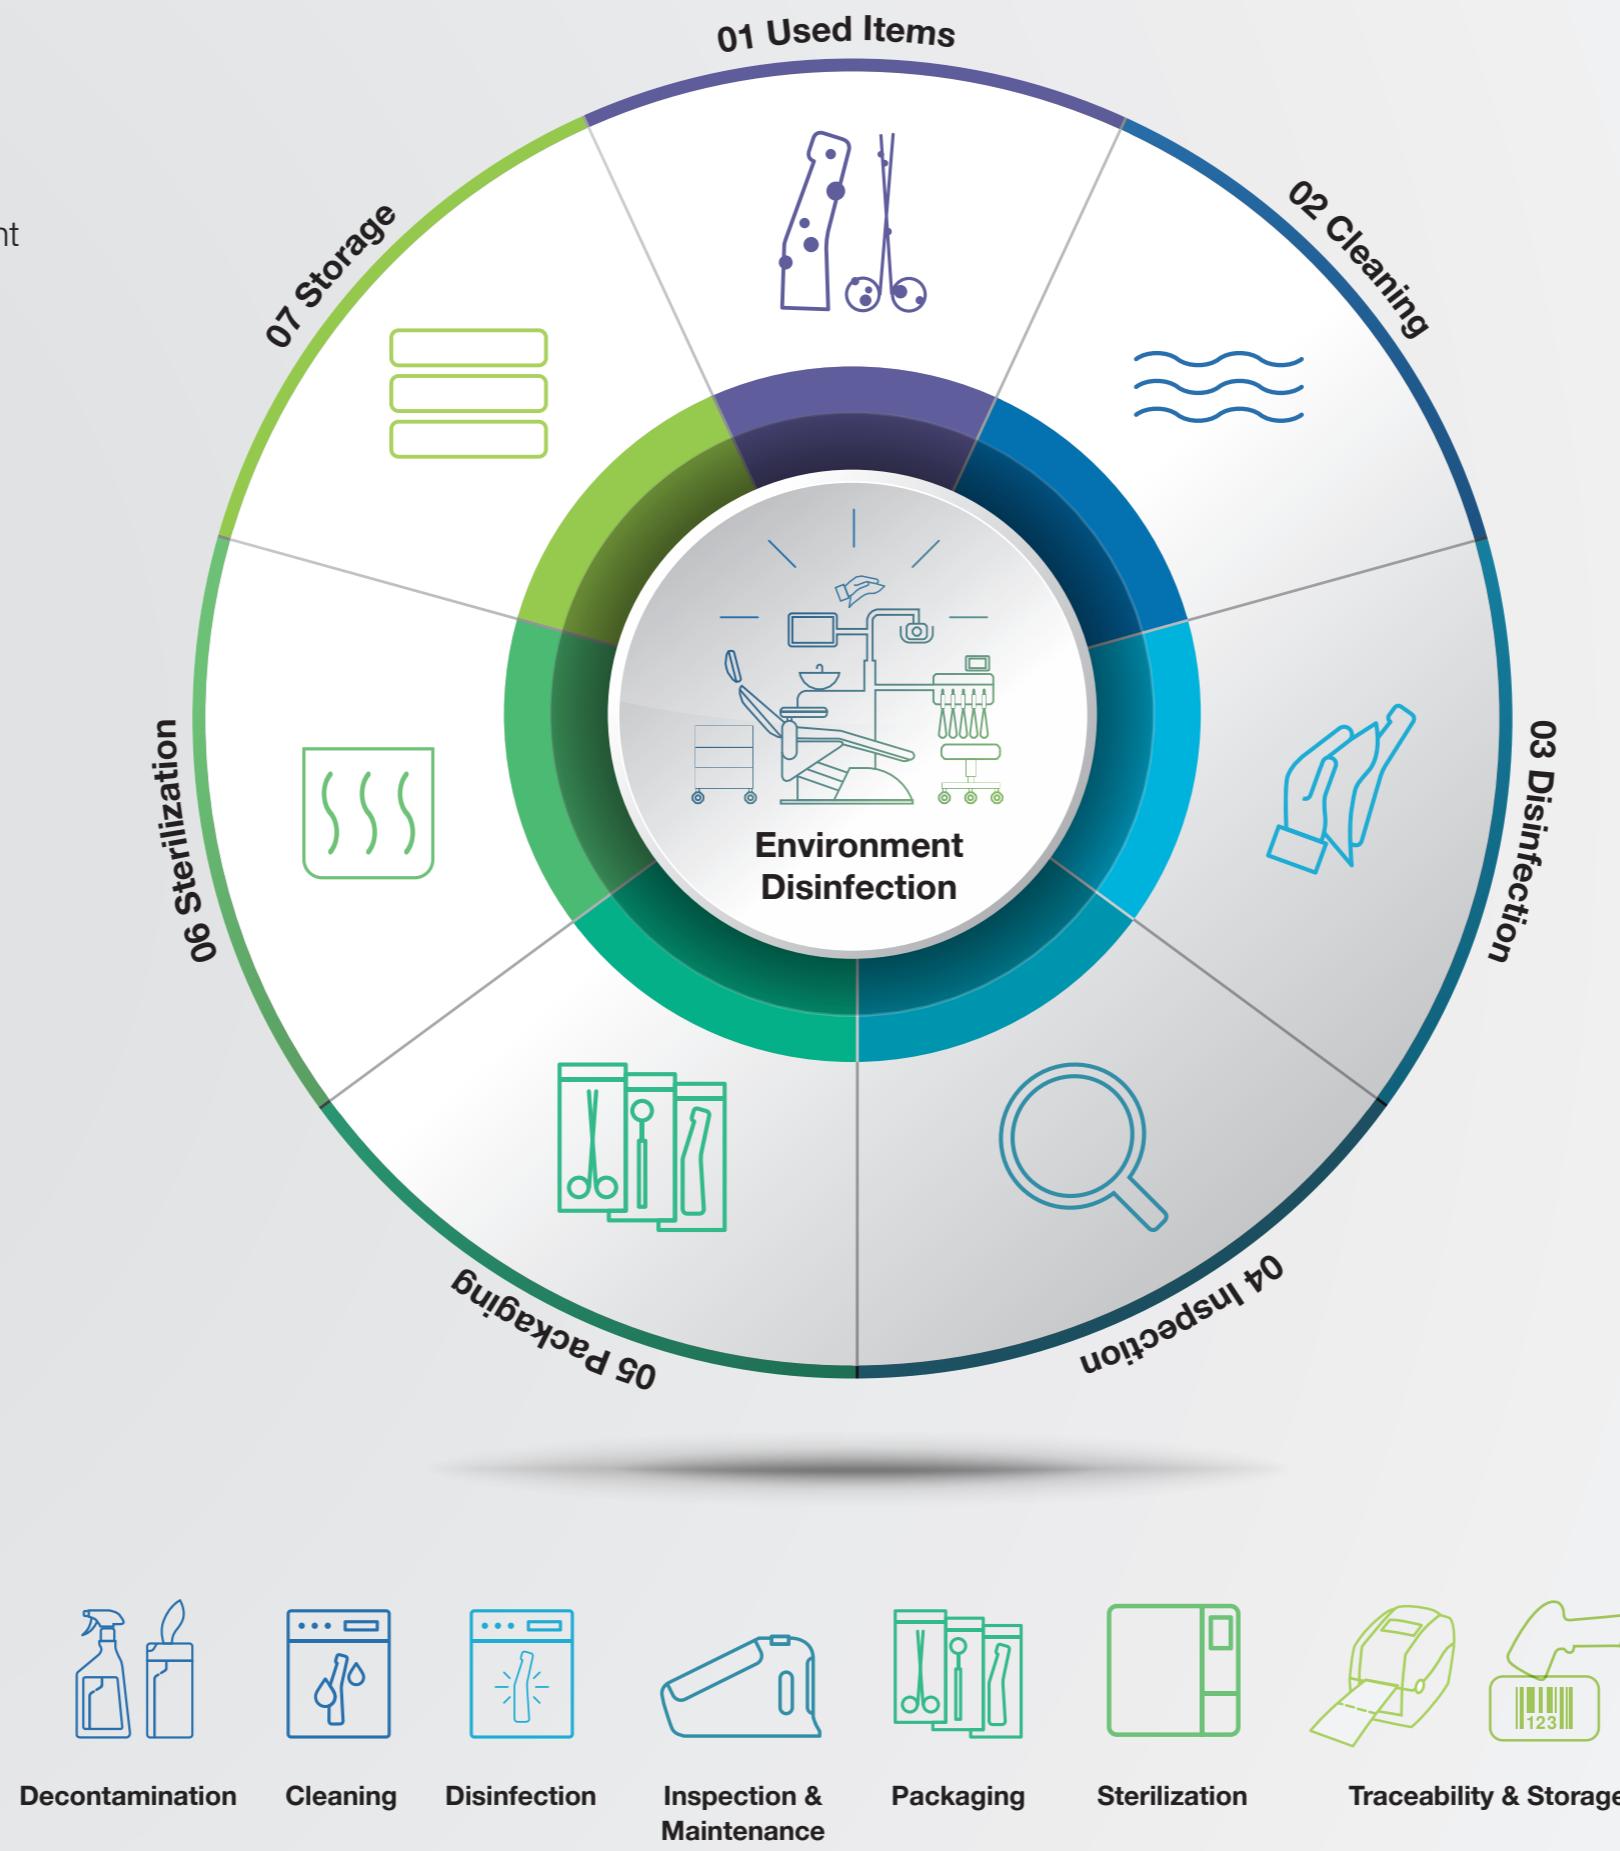

Technical data

CE  0297 

Type:	WE-56	WE-57	WE-66	HE-43
Gear ratio:	1:1		4:1	1:1
Head size:		Ø 10.1 mm		–
Head height: with 19 mm (FG bur) or 22.5 mm (Contra-angle handpiece bur):	24.3 mm	22.5 mm	24.3 mm	–
Rotary instruments:	Contra-angle handpiece bur	FG bur	Contra-angle handpiece bur	Straight and contra-angle handpiece burs
Instrument shaft diameter:	2.35 mm	1.6 mm	2.35 mm	2.35 mm
Max. length:	34 mm	25 mm	34 mm	50 / 34 mm
Weight:		65 g		72 g
Spray (optional):		Single external		
Instrument coupling:		ISO 3964 (Ø 20 mm) compatible		

Air motors AM-25

CE  0297 

Type:	AM-25 L RM	AM-25 A RM / AM-25 RM	AM-25 E BC	AM-25 LT* / AM-25 A*	AM-25 RQ
Coupling hose end:	Fixed connection Standard 6-hole	Fixed connection Standard 4-hole	Fixed connection Borden 2(3)-hole	Roto Quick	
Light (LED version):	Yes	–	–	Yes / –	–
Spray:	Internal	Internal / –	External	Internal / Internal	–
Weight:	77 g	78 g / 73 g	74 g	82 g / 84 g	71 g
Power:			30 W		
Speed range (min ⁻¹) at an operating pressure of:			2.5 bar: 5,000–20,000** 3 bar: 5,000–25,000**		
Direction of rotation:			Forward / Reverse drive		
Warranty:			24 months		

* Not suitable for thermal washer disinfector.

** The power and speed of air drives depend on the quality of the turbine hose and may differ from the specified value.

Attention: Not all products mentioned in this brochure are available in all countries. Please contact your local W&H representative for details.

Manufacturer:

W&H Dentalwerk Bürmoos GmbH
Ignaz-Glaser-Straße 53, Postfach 1
5111 Bürmoos, **Austria**
t +43 6274 6236-0
f +43 6274 6236-55
office@wh.com
wh.com

Distribution:

W&H (UK) Limited
6 Stroud Wood Business Centre
Park Street, St Albans, Hertfordshire AL2 2NJ, **United Kingdom**
t +44 1727 874990
f +44 1727 874628
office.uk@wh.com
wh.com



Pictures are for illustrative purposes only. Additional equipment and accessories shown are not included as standard.